

#### Contact us

Tel: +44 (0) 1684 273164

Email: enquiry@ingridwest.co.uk


## MULTI AXIS AUTOMATIC WINDING MACHINE 12 SPINDLE VERSION

### APPLICATION:

Relays, Automotive ABS coils, LCD coils, transformers, ignition coils, inductors, sensor coils, solenoids DVD reader, Inverter, Switching Power Supplies, Ballast Transformer and other bobbin-wound products....

### Main features:

- The wire guide movement can be freely programmed in all 3 axes (X, Y, and Z).
- Wraps either radial or axial pins, - programmable nozzle movement through 0°, and 90° angles.
- Wire cutting on bobbin pin, nozzle cut or nipper. Method can be chosen by operator and setup in the program.
- Password function, prevent accidental program change.
- Simplified programming with teach-in programming system using 15" touch screen.
- Easy to change tooling and machine set-up recalled from the onboard computer when changing product.
- Fully CE compliant.

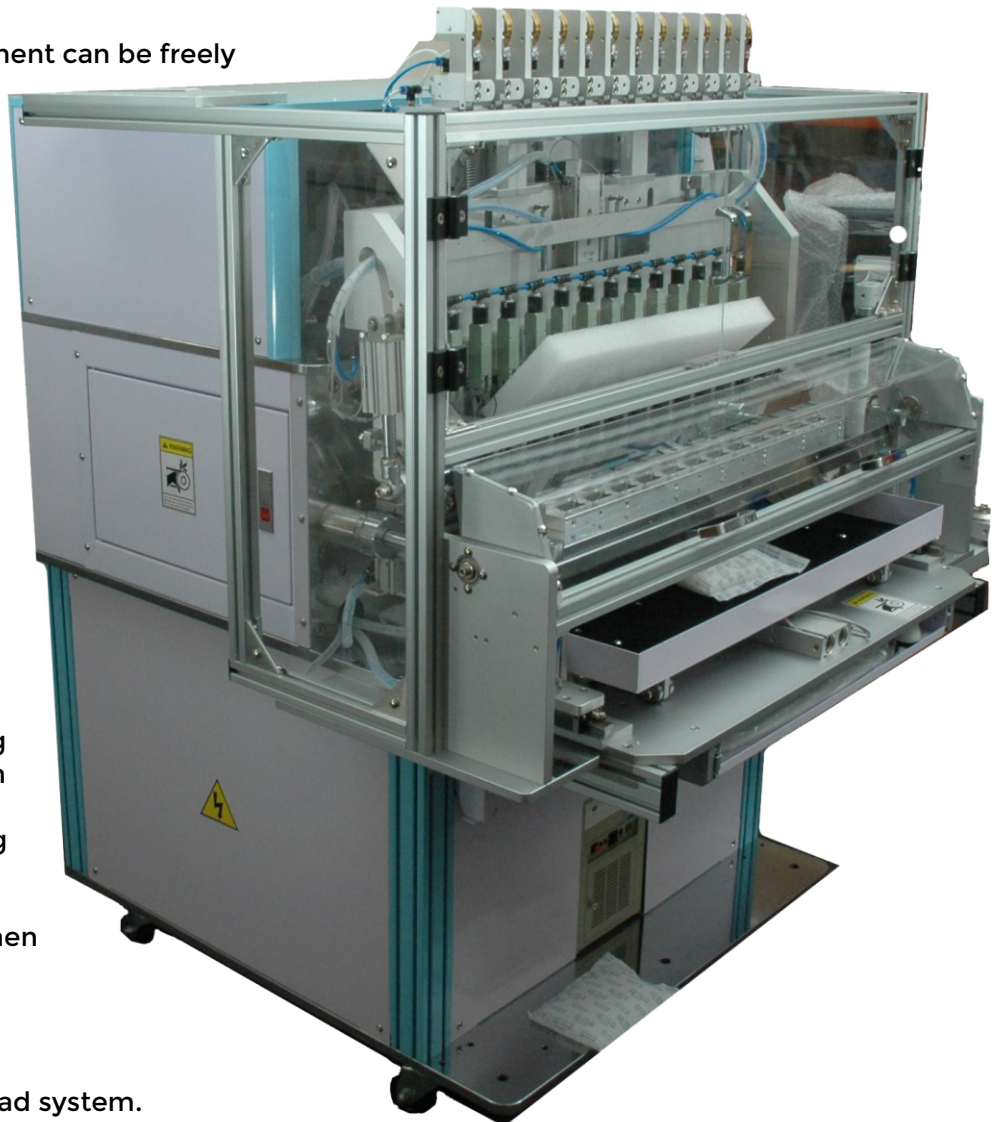

### Options:

- Automatic load / unload system.
- Load and unload shuttle transfer system (as shown below).
- Skeining (twisting) unit.
- Customised accessories to suit your application.

We aim to be much more than a machinery supplier. Our team has a vast range of winding experience and is able to offer help and advice on all aspects of coil winding, from tooling design to machine choice and set-up.

## COIL WINDING SOLUTIONS YOU CAN RELY ON

WORKING WITH LOCAL PARTNERS IN THE FOLLOWING COUNTRIES; Austria, Czech Republic, Germany, Hungary, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden.

Unit 5L, Delta Drive, Tewkesbury, Glos. GL20 8HB. United Kingdom.



**Contact us**

Tel: +44 (0) 1684 273164

Email: enquiry@ingridwest.co.uk

Main technical specifications		
No. of spindles	12	
Wire size	0.02-0.3 mm	
Max traverse width	85 mm	
Spindle pitch	55 mm	
Max bobbin diameter	45 mm	
Spindle speed	12,000 rpm	
Spindle position accuracy	+/- 0.1°	
Guide head drive motor	200W AC servomotor X, Y and Z axis	
Max movement of guide head	X (front/back)	100 mm
	Y (left/right)	75 mm
	Z (up/down)	65 mm
Nozzle positions	0°, 90° or 120°	
Max pin wrap speed	150 Turns / min	
Control system	Windows interface PC with USB connector & DVD ROM	
Interface	RS232 or USB	
Touch screen	15 inch	
Air supply	6 Bar	
Power supply	single phase 220V +/-10% 50Hz	
Power consumption	3 kVA	
Weight	650 kg	
Dimensions (cm)	110(W) x 150(L) x 155(H) - excluding wire spool stand	



We aim to be much more than a machinery supplier. Our team has a vast range of winding experience and is able to offer help and advice on all aspects of coil winding, from tooling design to machine choice and set-up.

**COIL WINDING SOLUTIONS YOU CAN RELY ON**

WORKING WITH LOCAL PARTNERS IN THE FOLLOWING COUNTRIES; Austria, Czech Republic, Germany, Hungary, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden.

Unit 5L, Delta Drive, Tewkesbury, Glos. GL20 8HB. United Kingdom.

