


WH-S01 WIRE STRIPPING MACHINE


SPECIFICATION

Features	A fast and inexpensive method of wire stripping. To strip the wire, simply insert the end of the enamelled wire, turn by 90 degrees and then remove the stripped wire.
Wire Range	2.0 - 8.0 mm, - adjustable screw
Tooling	Removal of enamel coating on copper wire using 0.06 / 0.1 or 0.2mm (Fine/Medium/Course) wire brush wheels
Application	Wire enamel removal
Stripping	Single wire only
Mounting	Bench mounted, for stable operation
Power supply	AC 230 / 110 V ± 10%, 50/ 60hz
Dim (mm)	390 L * 180 W * 180 H
Weight	20 kg

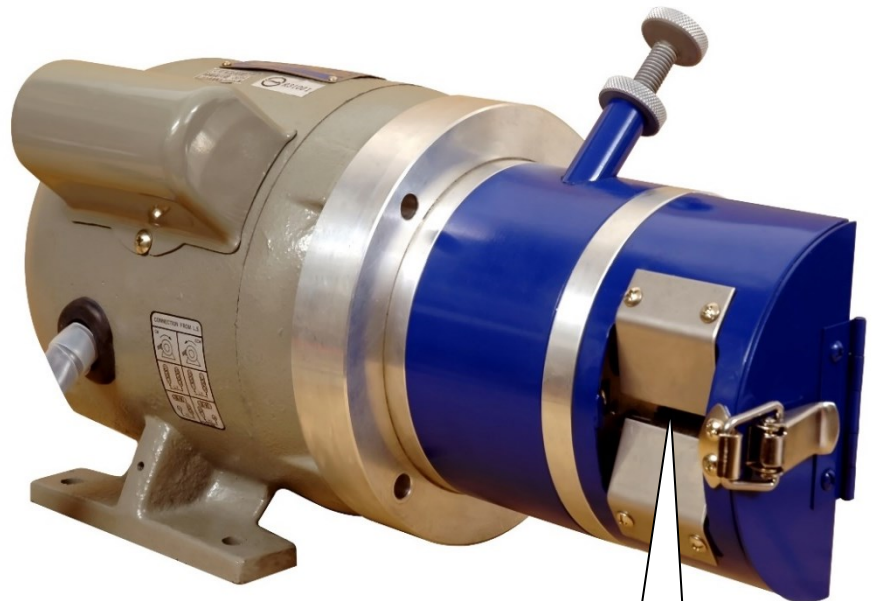

There are 3 brush types available, each suited to a specific wire range.

P/N	Wire range	Description
S01-0.06mm	0.1 mm - 0.2 mm	Steel brushes with 0.06 mm wire Set of two
S01-0.1mm	0.2 mm - 0.3 mm	Steel brushes with 0.1 mm wire Set of two
S01-0.2mm	> 0.3 mm	Steel brushes with 0.2 mm wire Set of two

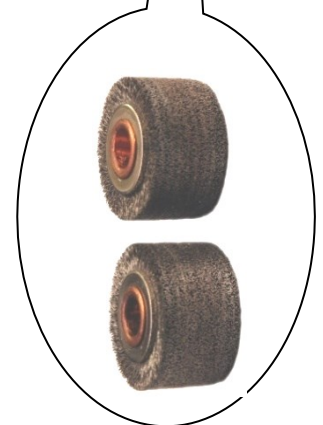

We aim to be much more than a machinery supplier. Our team has a vast range of winding experience and is able to offer help and advice on all aspects of coil winding, from tooling design to machine choice and set-up.

COIL WINDING SOLUTIONS YOU CAN RELY ON

WORKING WITH LOCAL PARTNERS IN THE FOLLOWING COUNTRIES; Austria, Czech Republic, Germany, Hungary, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden.

Unit 5L, Delta Drive, Tewkesbury, Glos. GL20 8HB. United Kingdom.